



SL 3K1



The 18-SL 3K1, was designed to reproduce the sub bass and bass, in car sound systems and professional performance systems (bands, concerts, bars, churches, outdoor systems, theaters, cinemas and etc.

We invite you to dive into a sound experience, where low frequencies are harmonized with great fidelity, through velvety bass and clean timbres.

ELECTRIC PARAMETERS

RMS POWER	1.550 W
MUSICAL PROGRAM POWER	3.100 W
NOMINAL IMPEDANCE	4 or 8 Ohms
RESISTANCE (RE)	2,9 / 6,0 ohms/VCC
NO (EFFICIENCY REFERENCE)	2,500%
DIAPHRAGM MASS (MMD)	166,226 g
TOTAL MASS (MMS)	190,519 g
BL PRODUCT	25.853 TM
MECHANICAL Q (Qms)	9,568
ELECTRIC Q (Qes)	0,394
TOTAL Q (Qts)	0,378
COMPLIANCE (CMS)	99,008u M/N
EQUIVALENT VOLUME (VAS)	206,876 L
SENSITIVITY (@ 1W, 1 m)-Free-Air	95,998 dB
FREQUENCY RESPONSE	25 to 800 Hz
RESONANCE FREQUENCY	36,6 Hz
EFFECTIVE CONE AREA (SD)	0,1213 Sq.m
CONE EXCURSION WITHOUT DISTORTION (X MAX)	- + 12 mm
FLOW DENSITY IN THE GAP	10.000 GAUSS

Thiele-Small parameters are obtained after applying a sinusoidal level of 50hz for a period of 30 minutes. A tolerance of + - 15% on the specified values is allowed.

MECHANICAL PARAMETERS

NOMINAL DIAMETER	18 Inches
FERRITE MEASURES	220 x 25 mm
COIL DIAMETER	4 Inches
COIL HEIGHT	31 mm
COIL WIRE MATERIAL	Copper
COIL WIRE SECTION	Round
COIL SHAPE	*Kapton®
GAP HEIGHT	14 mm
HOUSING MATERIAL	Aluminum
FERRITE MATERIAL	Barium
WEIGHT	14,6 Kg
VOLUME OCCUPIED ON THE CABINET	6,4 Liters


*Kapton® registered trademark by DUPONT


CABINET SUGGESTION

MODEL	VOLUME	DUCTS	DUCTS	DUCTS	SYNTONY	(H.P.F)	ATTENUATION
	LITERS	QUANT.	DIAM.	DEPTH			(ACTIVE)
VENTED BOX	120	04	4"(POL)	207 mm	50 Hz	45 Hz	- 24 dB/ Octave
	150	04	4"(POL)	295 mm	40 Hz	35 Hz	- 24 dB/ Octave

SUGGESTIVE MEASURES

PRODUCT DIMENSIONS

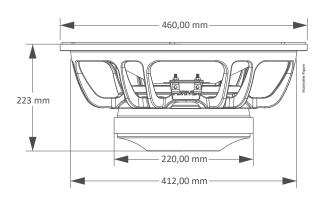

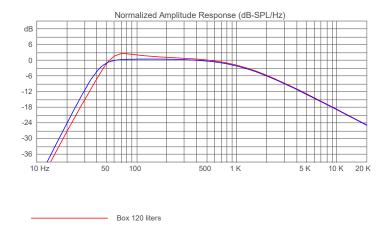

----- Box 150 liters

^{*}For professional lines, it is mandatory to use a cotton or glass wool blanket

WARRANTY TERM

When all our products are produced, they undergo rigorous evaluations, in each construction process until they are packaged, however, if any type of abnormality is detected, when opening the package, it must be sent to one of our authorized service stations, or directly to the factory, if there is not an authorized technitian in your region. **Each and every product must undergo a technical evaluation so that the defect is identified and proven.**

The product has a warranty of 15 (fifteen) months after the issuance of the invoice, with the legal warranty of 90 days, provided for in article 26, item II, of law No. 8078/90 (Brazilian consumer protection code).

Warranty Conditions:

The product must be installed correctly, by a specialized professional, as well as respecting the product characteristics.

The customer will NOT have the warranty when:

- Exceed the period of 15 (fifteen) months.
- Damages incurred are caused by; transport or handling accident, or humidity.
- Defects caused by improper installation.
- Malfunctions in product parts (torn cone/dust cap, bent or broken speaker housing).
- Coils burned out by excessive power or extreme distortion conditions, causing heating above 240°.

Warranty Coverage:

- Taramps guarantees its products against any defect in material or manufacturing process, provided that, at the
 discretion of its authorized technicians, it is found to be defective under normal conditions of use.
- The PRODUCT must contain the original label, on which its serial number is inserted.
- To use the warranty, the customer must present the invoice and the warranty term, both of which must contain the serial number on the product label.

Transport

Only products that fall under the terms of warranty coverage will have their transportation expenses covered, otherwise, the expense will be at the customer's expense.

WARRANTY CERTIFICATE

NAME:			<u> </u>
ADDRESS:			
CITY:		ZIP:	
STATE:		FHONE:	
DEALER:			
ADDRESS: _			
CITY:		ZIP:	
STATE:		PHONE:	
	INVOICE	NUMBER	