



BASS

1K2



Developed to respond low frequencies, the BASS 1K2 combines sound quality and power, its double coil of 2+2 or 4+4 ohm, provide flexibility that allows different connection configurations with amplifiers. The cone was produced with cellulose and vacuum formatted, allowing the BASS 1K2 to respond faithfully to low frequencies, providing used and involved subwoofers.

ELECTRIC PARAMETERS

RMS POWER	300+300 W
MUSIC POWER	600+600 W
NOMINAL IMPEDANCE	2+2 or 4+4 Ohms
RESISTANCE	1,6+1,6 / 3,2+3,2 ohms/VCC
NO (EFFICIENCY REFERENTIAL)	0,260%
SENSITIVITY (@ 1W, 1 m)-Free-Air	86,173 dB
MASS DIAPHRAGM (MMD)	82,264 g
TOTAL MASS (MMS)	85,563 g
BL PRODUCT	10.356 TM
MECHANICAL Q (Qms)	8,508
Q ELECTRIC (Qes)	0,535
Q TOTAL (Qts)	0,504
EQUIVALENT VOLUME (VAS)	38,770 L
COMPLIANCE (CMS)	265.846u M/N
FREQUENCY RESPONSE	25 to 1.000 Hz
RESONANCE FREQUENCY	33,37 Hz
EFFECTIVE CONE AREA (SD)	0,0320 Sq.m
CONE EXCURSION WITHOUT DISTORTION (X MAX)	- + 12 mm
FLOW DENSITY IN THE GAP	9.900 GAUSS

The Thiele-Small parameters are obtained after the application of a 40Hz sinusoidal signal for a period of 30 minutes at a pre-established voltage for the break-in.
A tolerance of + - 15% is allowed for specific values.

MECHANICAL PARAMETERS


NOMINAL DIAMETER	10 Inches
FERRITE DIAMETER	2 of 134x16 mm
COIL DIAMETER	2 Inches
COIL HEIGHT	29 mm
COIL WIRE MATERIAL	Copper
COIL WIRE SECTION	Round
COIL SHAPE	*Kapton®
GAP HEIGHT	9 mm
HOUSING MATERIAL	Aluminum
FERRITE MATERIAL	Barium
WEIGHT	5,62 Kg
OCCUPIED VOLUME OF THE CABINET	2,1 Liters

*Kapton® registered trademark DUPONT


CABINET SUGGESTIONS

MODEL	VOLUM LITER	DUCT AUMONT	DUCT DIAMETER	DUCT DEPTH	TUNE
VENTED BOX	35	01	3"(Inches)	210 mm	36 Hz
	***	***	***	***	***

SUGGESTIVE MEASURES

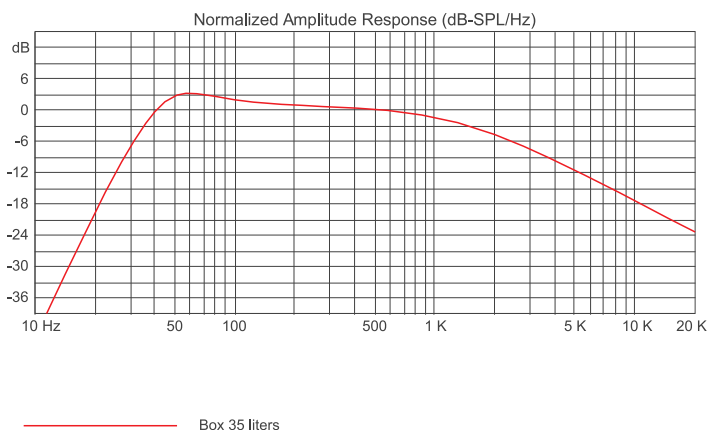

PRODUCT DIMENSIONS

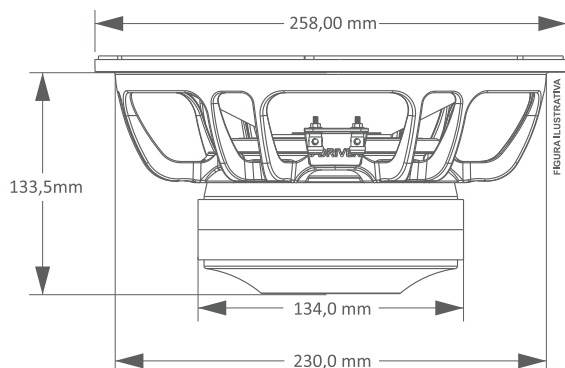

Warranty Term

All of our products, when produced, undergo rigorous evaluations, in each construction process until they are packaged, however, if any abnormality is detected when opening the packaging, it must be forwarded to one of our authorized service stations. If there's no one in your region it must be forwarded directly to the factory. **Each and every product must undergo a technical evaluation, in order to identify and prove what happened.**

The products are guaranteed for 1 (one) year after the invoice issuance, with the legal guarantee of 90 days, provided for in art. 26, item II, of law No. 8078/90 (Brazilian consumer protection code).

Warranty Conditions:

The product should be installed properly, by a qualified professional, respecting the product characteristics..

The customer **WILL NOT** have the warranty when:

- Exceed the 1 (one) year term.
- The damage is caused by a transport, handling or humidity accident.
- Damage caused by improper installation.
- Malfunctions in parts of the product (torn cone/hubcap, bent or broken speaker housing).
- Coils burned by excess power or extreme distortion conditions, causing heating above 240°.

Warranty Coverage:

- 7DRIVER guarantees its products against any defect in material or manufacturing process, provided that, at the discretion of its authorized technicians, a defect is found under normal conditions of use.
- **The PRODUCT must contain the original tag, in which its serial number is inserted.**
- To use the warranty, the customer must present the invoice and the warranty term, both must contain the serial number on the product tag..

Transport:

Only products under the warranty coverage will have their transportation expenses covered, otherwise the expense will be paid by the customer.

WARRANTY CERTIFICATE

NAME: _____

ADDRESS: _____

CITY: _____ ZIPCODE: _____

STATE: _____ PHONE: _____

STORE: _____

ADDRESS: _____

CITY: _____ ZIPCODE: _____

STATE: _____ PHONE: _____

INVOICE Nº