

Instruction manual



T 400.4 HF
200W RMS - 400W MUSICALS



The installation of this product must be made by a qualified professional.

T 400.4 HF

PASSIVE BOX WITH 4 SPEAKERS - 4 OR 8 OHMS

The T 400.4 HF Passive Speaker was designed to achieve excellent precision in audio reproduction. Thanks to its wide frequency response (75Hz to 22KHz), it guarantees accurate and natural audio reproduction throughout its entire operating range. This model is ideal to work in conjunction with the T 1200 LF Passive Speaker.




Technical parameters

RMS power_____	200 W
Musical power_____	400 W
Nominal impedance_____	4 or 8 Ohms
Sensitivity (@1W, 1m)-Free-Air_____	93 dB
Finishing_____	Painting LACA/PU
Frequency response (-6 dB)_____	75 Hz to 22 KHz
Resonance frequency_____	118 Hz
Weight without packaging_____	6.78 kg (14.92 lb)
Dimensions (WxHxD)_____	145x570x180 mm
Acoustic components_____	4 speakers 4"
Cabinet_____	MDF 15mm
Grid finish_____	Electrostatic painting
Colors_____	White or black
Recommended frequency cutoff HPF -12 dB octave_____	90 Hz

Package content


•01 (one) T 400.4 HF acoustic box;

Response curves x impedance 4 Ohms

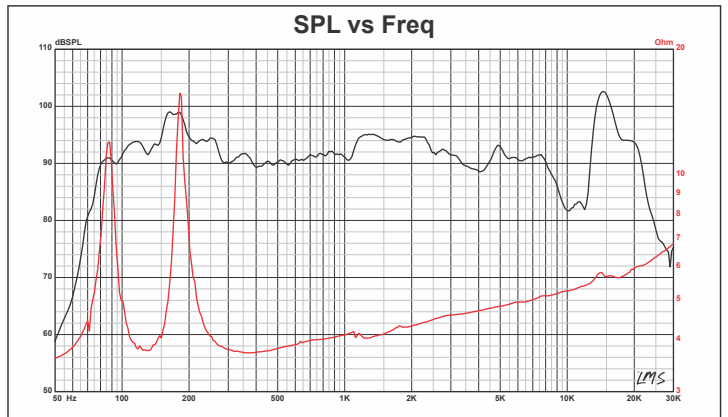


Response curve an anechoic chamber, 1W / 1M.

Product dimensions

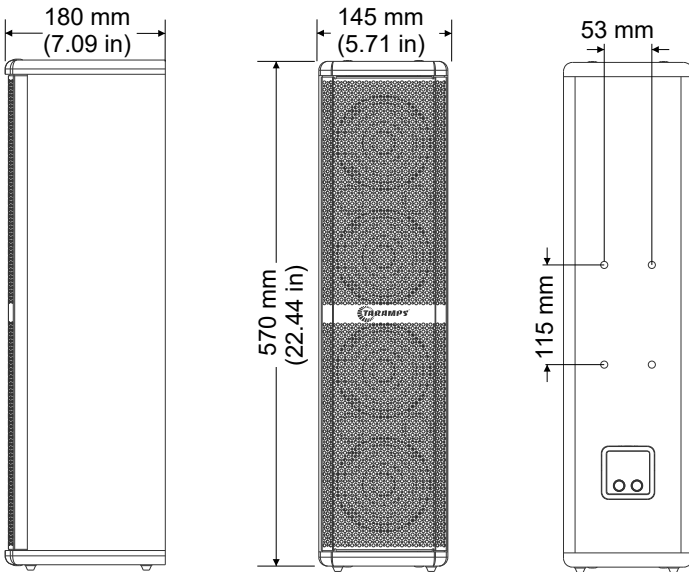

Response curves x impedance 8 Ohms

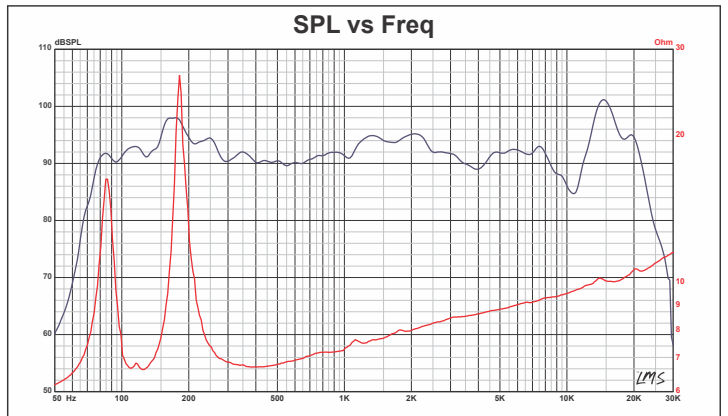

Response curve an anechoic chamber, 1W / 1M.

NOTE: Features, specifications and aesthetic aspects are subject to change without prior notice.

Manufactured by: TARAMPS ELECTRONICS LTDA - TAX ID: 11.273.485/0001-03 - KM 30 Júlio Bidisk Hwy, Da pedraira Neighborhood, Alfredo Marcondes, SP - 19180-000, Brasil - Made in Brazil