Instruction manual





T 800.8 HF


PASSIVE BOX WITH 8 SPEAKERS - 4 OR 8 OHMS

The T 800.8 HF Passive Speaker was designed to achieve excellent precision in audio reproduction. Thanks to its wide frequency response (71Hz to 22KHz), it guarantees accurate and natural audio reproduction throughout its entire operating range.

Technical parameters

RMS power	400 W
Musical power	800 W
Nominal impedance	4 or 8 Ohms
Sensitivity (@1W, 1m)-Free-Air	95 dB
Finishing	Painting LACA/PU
Frequency response (-6 dB)	71 Hz to 22 KHz
Resonance frequency	100 Hz
Weight without packaging	12.89 kg (28.36 lb)
Dimensions (WxHxD)	145x1073x180 mm
Acoustic components	8 speakers 4"
Cabinet	MDF 15mm
Grid finish	Electrostatic painting
Colors	White or black
Recommended frequency cutoff HPF -12 dB octave	80 Hz

Product dimensions

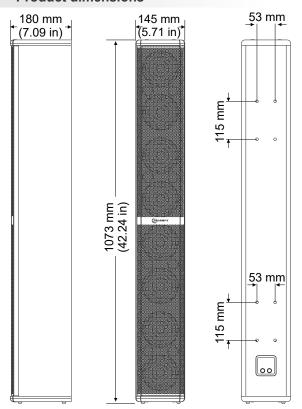


Comments of the Comments of th

Package content


•01 (one) T 800.8 HF acoustic box;

Response curves x impedance 4 Ohms

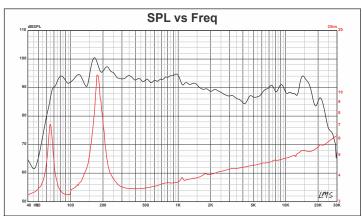

Response curve an anechoic chamber, 1W / 1M

Response curves x impedance 8 Ohms

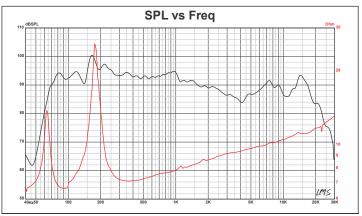

Response curve an anechoic chamber, 1W / 1M.

NOTE: Features, specifications and aesthetic aspects are subject to change without prior notice.