

# SUPPORT Supports up to 15kg

#### Package content:

- •04 S-10 plastic bushings;
  •04 superb hexagonal screws 5/16 x 50 mm;
  •02 hexagonal screws M6 x 16 mm;
  •02 hexagonal screws M6 x 45 mm;
  •02 M6 locking nuts;
- •06 6 mm flat washers.

# Installation with fixing support

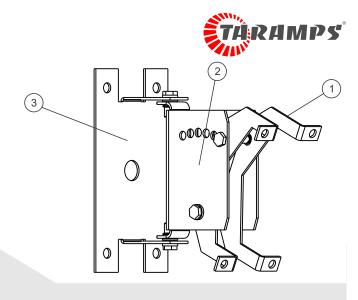



0

0 0

0

n

0

angle

00000

part 2

ew M6 x 16mm

00

0

തര

С

# 1st STEP

Screw part 1 into the passive box with  $\underline{\text{detail 1}}$  positioned downwards, as shown in image 1.

Use the screws that are attached to the back of the box.

33 lb

#### 2nd STEP

Screw part 2 together with part 3, so that the **<u>angle holes</u>** are upwards, as shown in image 2.


Use 2 washers and 2 M6 x16mm screws

## 3rd STEP

Screw the support to the wall, using 4 hexagonal screws  $5/16 \times 50 \text{ mm} + 4 \text{ plastic}$  anchors.

Insert the screw in part 2 as shown in image 3, this screw will be used to receive the passive box.

Use 2 washers, 1 M6 x 45mm screw and 1 M6 nut.




## 4th STEP

Position your passive box next to the support already on the wall and adjust the desired inclination.

Each support position is equivalent to 8 degrees of inclination

Use 2 washers, 1 M6 x 45mm screw and 1 M6 nut.

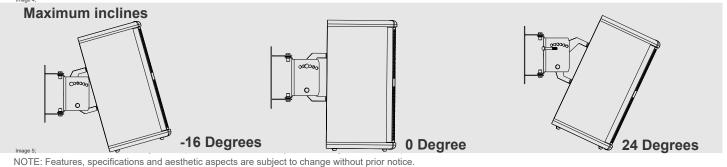

Manufactured by: TARAMPS ELECTRONICS LTDA - TAX ID: 11.273.485/0001-03 - KM 30 Júlio Bidisk Hwy, Da pedreira Neighborhood, Alfredo Marcondes, SP - 19180-000, Brasil - Made in Brazil

+55 18 3266-4050

www.taramps.com.br