

Instruction manual



SMART **3** BASS
Power Control System 0.5 ~ 2 OHMS



The installation of this product must be made by a qualified professional.

Index

- 01 • Term of warranty**
 - Technical assistance
 - Smart Bass line presentation
- 02 • Introduction**
 - Smart line presentation
 - Key recommendations
- 03 • Functions, inputs & outputs**
- 04 • Power supply connector**
 - LEDs indicators & protection system
- 05 • Installation**
 - Recommended wire gauge & fuse
- 06 • Technical features**

Term of warranty

TARAMPS, located at Júlio Budisk highway, SN, KM 30 - Alfredo Marcondes - SP, ZIP CODE 19.180-120, warrants this product against design, manufacturing, assembly and/or joint and several defects due to design flaws that make it unsuitable or inappropriate for its intended use, for a period of 12 months from the date of purchase. In the event of a defect within the warranty period, TARAMPS' liability is limited to repairing or replacing the device manufactured by It.

This warranty does not include:

- Products that were damaged by incorrect installation, water infiltration, tampering by unauthorized individuals.
- Scratched or torn warranty seal;
- Cases in which the product is not used under regular conditions;
- Defects caused by accessories, modifications or equipment attached to the product;
- The product presents damage resulting from drops, impacts or the action of agents of nature (floods, lightning, etc.);
- Costs of removal and reinstallation of the equipment, as well as its transport to the technical assistance location;
- Damages of any kind, resulting from problems with the product, as well as losses caused by discontinuation of use.

Technical assistance

For international support, check on our website:

www.taramps.com.br/en/rede-de-assistencias-tecnicas

or contact direct the factory support:

Phones: +55 18 3266-4050 / +55 18 99749-3391

E-mail: service@taramps.com.br

Smart Bass Line Presentation

Multi-impedance: Featuring new control technology and new functions, the SMART 3 BASS has 3000W RMS rated power in the range of 0.5 to 2 Ohms: (0.5 - 1 - 1.33 - 1.5 - 1.67 and 2 Ohms with same power);

SMART LEDS: LEDs output signal level indicator on top of product;

RCA input for up to 4V RMS: Input gain adjustment that allows head units up to 4V RMS output level;

Dual RCA IN / OUT Input: RCA connector with input and output function, eliminates the needing of "Y" cables for send the same unput signal to another amplifier;

Power connector for cables up to 1/0 AWG: Allows the use of power cables with larger gauge (up to 50mm²) for higher performance;

AUTO-Restart Protections: The amplifier automatically restarts after a protection event;

RAMP audio initialization: After turning on the amplifier, audio is released gradually (ramp).

Introduction

Read this manual before preparing the product. In case of doubt, contact our technical support: **(18) 3266-4050** or www.taramps.com.br/es



At the end of its useful life, this product must not be disposed of in household waste. Look for an electronic equipment collection or recycling center for proper disposal.

Declaration of Conformity



TARAMPS ELECTRONICS LTDA
Alfredo Marcondes - SP
Brazil

Hereby, Taramps Electronics Ltda declares that the product SMART 3 BASS complies with the Directive 2014/30/EU, according with the following harmonized standard:

-EN 50498:2010 *Electromagnetic compatibility (EMC) - Product family standard for aftermarket electronic equipment in vehicles*

The full text of the EU Declaration of Conformity is available at the following Product Page on Internet.

Safety requirements

To ensure proper use, please read through this manual before using the amplifier. It is specially important that you know the **CAUTIONS** contained here.

- The installation of this amplifier must be done by a qualified professional.
- Wear safety glasses, insulated gloves and correct tools for installing this product.
- This amplifier is for use with 12V batteries. Always check the voltage before installing.
- This amplifier must be installed in a firm place with at least 1" space around the heatsink for proper heat spreading.
- Never install the amplifier in places exposed to dust, humidity and water. Pay attention to install it far from fuel tank, fuel lines, heat sources and other parts of vehicle.
- Be sure to install protection fuse or a circuit breaker near to battery. Follow the ampere rating as indicated here in this manual. Use of improper fuse or circuit breaker could result in overheat, smoke, damage to product, injury or burns.
- Avoid running wires over or through sharp edges. Use rubber or plastic grommets to protect any wires routed through car's body.
- Before make any connection to amplifier, disconnect the battery negative terminal.
- When in use, the external surface of may amplifier becomes hot. Avoid touching the heatsink area and keep childrens far from the amplifier.
- This amplifier may produce high sound pressure levels. Avoid continuous exposure to levels over 85dB to prevent permanent hearing loss.
- Output connections for speakers may have voltage levels when the amplifier is operating. Make sure that the amplifier is turned OFF before proceed any connection or disconnection in this terminals.
- If you want to dispose this amplifier, don't throw it on domestic waste. It must be collected by an used electronic product disposal service for proper recycling.

⚠ Safety

As you read this manual, pay attention to the safety symbols.


⚠ CAUTION

This symbol with **“CAUTION”** is intended to alert the user to the presence of important instructions. Failure to heed the instructions will result in risk of injury to user or product damage.



Taramps reserves the right to modify the contents of this document at any time without prior notice and does not have the obligation to apply the changes in units which were previously produced.

Functions, inputs & outputs

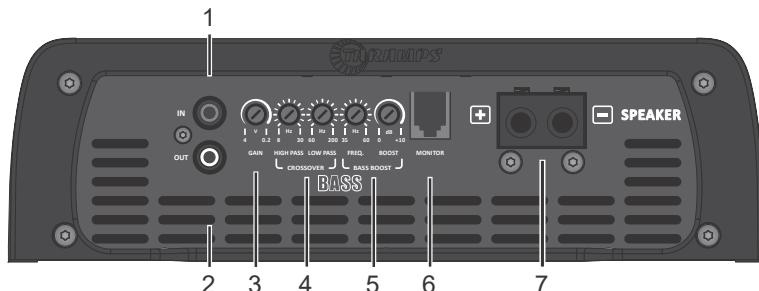

1 - IN: Input of signal to be amplified. Connect the to the RCA output of the Head Unit using good shielded cable to avoid noise interference.

2 - OUT: Audio signal output. Sends the same input (IN) signal to another amplifier, allowing cascading.

3 - GAIN: Adjusts the input sensitivity of the amplifier, allowing a perfect adjustment to the output signal levels of various head units models on the market. It is possible to adjust from 4V (minimum sensitivity) to 0.2V (maximum sensitivity).

4 - CROSSOVER

HIGH PASS FILTER (HPF): Variable setting from 8Hz to 30Hz, which determines the start of the amplifier's operating frequency.

LOW PASS FILTER (LPF): Variable setting from 60Hz to 200Hz, which determines the end of the amplifier's operating frequency.

5 - BASS BOOST

FREQ.: Set the frequency of bass boost from 35Hz to 60Hz.

BOOST: Set the boost level from 0 to +10dB at the frequency set in FREQ.

6 - MONITOR LEVEL REMOTE: Connection to an accessory, which function is to control the gain and monitor the amplifier where all information from the indicator LEDs, such as distortion (CLIP/TEMP) and protection actuation (PROT), will be displayed simultaneously. (**Accessory not included.**
Obs.: This product includes the **LED Monitor**.


7 - SPEAKER: SPEAKER: Output (positive and negative) for connecting transducers (speakers). Follow the indicated polarity.

For speaker associations, the impedance to consider is the resulting impedance:

⚠ CAUTION Due to the presence of voltage at the output terminals when the product is turned on, avoid contact with them. Risk of electric shock.

Loudspeakers Parallel connection example	Quantity Impedance	Resulting Impedance	Power
	D2+D2 1 OHM 1 OHM	0.5 OHM	
	4 x 4 OHMS	1 OHM	
	3 x 4 OHMS	1.33 OHMS	3000W RMS
	4 x 6 OHMS	1.5 OHMS	
	2 x 4 OHMS	2 OHMS	

Power supply connector

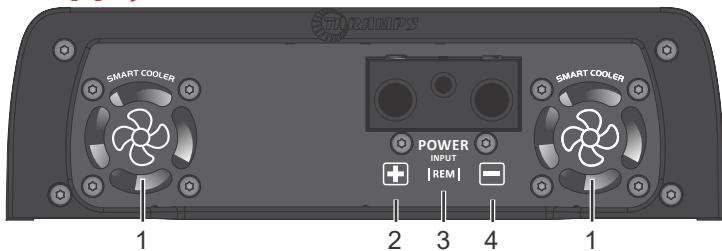

1 - SMART COOLER: This amplifier has two internal ventilation fans. For perfect functioning, the amplifier must be installed in a cool and aired place with at least 1" (25mm) space around the heatsink for proper heat spreading. The usually working temperature of amplifier is 65°C.

⚠ CAUTION The fan and ventilation openings are responsible for cooling the amplifier when it is in use, so it cannot be obstructed.

2 - POSITIVE POWER SUPPLY: Use a minimum 4 AWG up to maximum 1/0 AWG cable direct from the positive battery terminal, with fuse or circuit breaker (200A), as close to it as possible.

3 - TERMINAL REMOTE: It must be connected to the remote output of the head unit using a 18 AWG cable.

4 - NEGATIVE POWER SUPPLY: Use a cable of minimum 4 AWG up to maximum 1/0 AWG as short as possible, connected to the negative battery pole.

We recommend that all cables have tinned ends for better electrical contact.

In case of power bus bar using, avoid tightening with extenders on the allen wrench, as excessive torque may break the the terminal.

⚠ CAUTION Before making any connections to the power terminals, make sure that the negative (-) of the vehicle battery is disconnected.

LEDS indicators & protection system

Smart LEDs	Led of Monitor	Conditions
		Working amplifier
		Battery with voltage below 9V
		Battery with voltage above 16V
		Short circuit on output or between output terminal to GND
		Temperature above operating limit (> 85 °C)

The thermal protection waits for cooling before restarting.
If it goes into protection, the amplifier will automatically restart.

Example:

Low Battery Protection: Working amplifier → Red LED (LED Monitor) or Smart LEDS, flashes 2x → Red LED (LED monitor) or Smart LEDS, flashes 2x → Amplifier restarts.

Installation

⚠ CAUTION

CAUTION: All connections to power supply, input and output connectors must be carried out only with amplifier off.

Recommended wire gauge & fuse


Positive / negative power supply cable	Min. 4 AWG / Max. 1/0 AWG
Output cables wire gauge	9 AWG
Remote cable	18 AWG
Protection fuse or circuit breaker	200A

Calculated considering a maximum length of 4m. Distance greater than this, you will need to increase the cable gauges.

⚠ CAUTION

Using wire gauges below the recommendation will result in power loss and overheating of wiring.

Check polarity and never reverse power supply cables due to the risk of damage to the amplifier. It is compulsory to install a protection fuses or circuit breakers as close as possible from batteries.

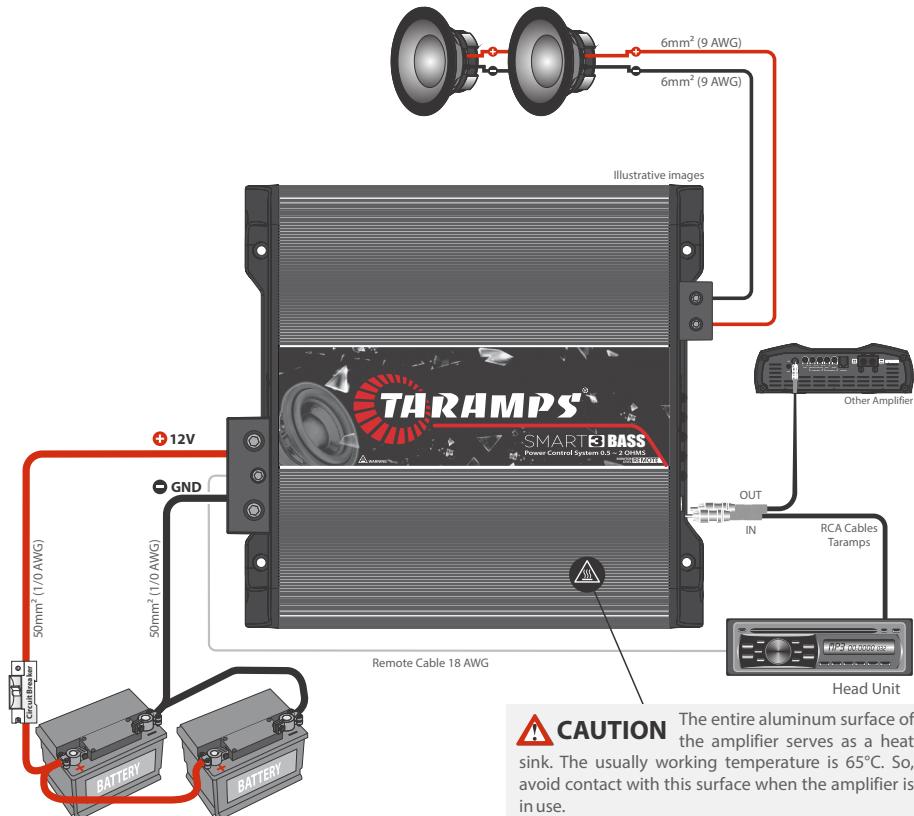

Examples of connections in the power supply input.
Note: Required battery bank capacity: At least 200Ah

⚠ CAUTION

The entire aluminum surface of the amplifier serves as a heat sink. The usually working temperature is 65°C. So, avoid contact with this surface when the amplifier is in use.

⚠ CAUTION

This equipment is not suitable for use in places where children may be present.

Technical features

Output Impedance Range: 0.5 Ohm ~ 2 Ohms

Number of Channels: 01

Output Power / @14.4VDC* 3000W RMS

0.5 OHM: 3000W RMS

1 OHM: 3000W RMS

2 OHMS: 3000W RMS

4 OHMS: 1700W RMS

Input Sensitivity: 4V ~0.2V

Signal- to-noise Ratio: >90dB

Frequency Response: 8Hz ~ 200Hz (-3dB)

Crossover

HPF (High Pass Filter): 8Hz ~ 30Hz (-12dB/8^a) Variable

LPF (Low Pass Filter): 60Hz ~ 200Hz (-12dB/8^a) Variable

Bass Boost: Freq.: 35Hz ~ 60Hz
Boost: 0 ~ +10dB

Efficiency: 75%

Input Impedance: 10K Ohms

Protection System: Output short-circuit, low/high supply voltage and Thermal protection

Minimum Supply Voltage: 9VDC

Maximum Supply Voltage: 17VDC

Idle Consumption: 1.10A

Musical Consumption / @14.4VDC: 190A

Rated Power Consumption: 278A


Dimensions (W x H x L): 9.37" x 2.80" x 9.45"

Weight: 6.60lb

*Rated power with 40Hz sinusoidal signal, THD <= 1%, with resistive loads, measured with SMD/AD-1 audio power analyzer or equivalent and the product at lower than 50°C case temperature and 14.4V supply voltage.

The values as above are typical and may vary, due to electronic components tolerance or manufacturing process.

For further informations or questions, visit our website or contact TARAMPS support.

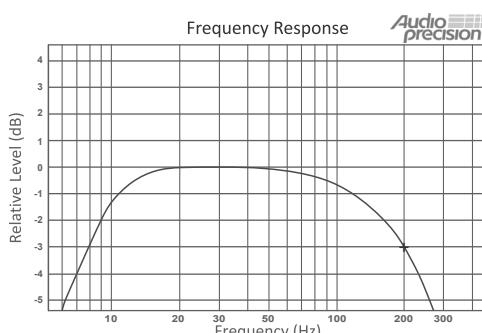



+55 18 3266-4050

Manufactured by:
TARAMPS ELECTRONICS LTDA
Tax ID: 11.273.485/0001-03
Julio Budisk Rd, SN, KM 30
Alfredo Marcondes - SP
made in Brazil
www.taramps.com.br